



The spray system produces clear and transparent ice cubes and the patented **Bright Cube** shape grants a longer lasting cube for you to enjoy your cold drinks

Self contained ice maker.

Up to 90kg production per 24/hr of medium ice cube.
42kg storage bin.


Complete with legs, water & drain hoses + 1 ice scoop.
10 AMP power supply.

291 mm drain height including legs to finished floor.




ICE PRODUCTION



Air Cooled Unit

Air Temp.	Water Temperature			
				
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	82	85	87	89
50°	181	187	192	196
21°	75	78	80	82
70°	165	172	176	181
32°	62	65	67	69
90°	137	143	148	152
38°	51	54	56	58
100°	112	119	123	128

Water Cooled Unit

Air Temp.	Water Temperature			
				
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	82	85	87	89
50°	181	187	192	196
21°	78	82	84	86
70°	172	181	185	190
32°	73	76	79	82
90°	161	168	174	181
38°	69	72	75	78
100°	152	159	165	172

CUBE TYPE



20g weight BRIGHT CUBE

32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

CONTROL PANEL



Switch On/Off


Ice size regulation screw


BIN CAPACITY

42 kg - 93 lbs | 2100 pcs

DIMENSIONS

W x D x H (mm)

 700 x 580 x 910/1030

 760 x 630 x 1070

OPERATING REQUIREMENTS

Rejected Heat 2865 W





Air Volume 450 m³/h
















220-240/50/1






R134a GWP = 1430


MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 Bar (14 psi)		5 Bar (70 psi)

SPECIFICATIONS



	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg	 lbs	 kg	 lbs	 Ton CO2 equiv.
CS90 A		1910	980	10	28.2	7.45	61	134	73	161	0.50
CS90 W		1910	820	10	19.7	51.4	61	134	73	161	0.53

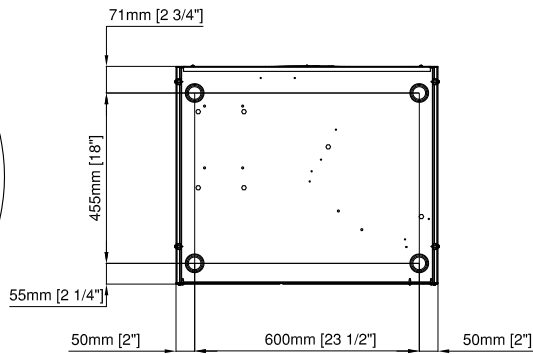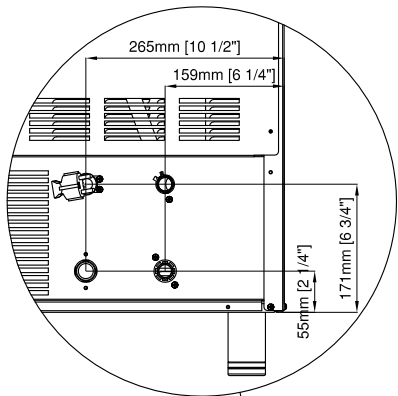

Back View
Vista Posteriore


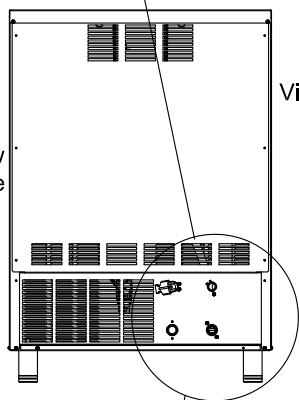


Front View
Vista Frontale

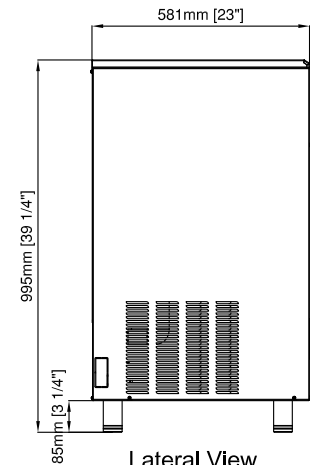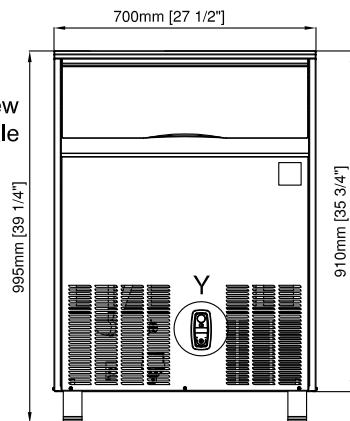

Lateral View
Vista Laterale

Top View
Vista Superiore

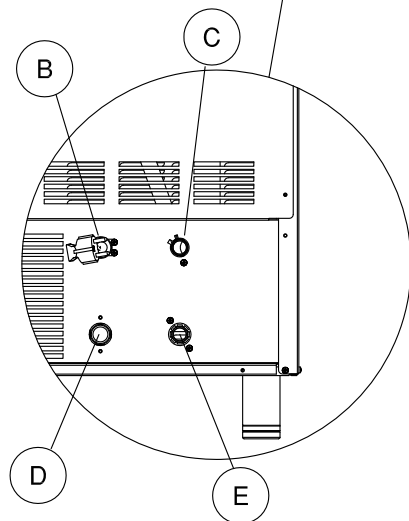

- (A) Switch On/Off
- (D) Water outlet connection water condensation 20mm diam.
- (B) Electrical cable supply
- (E) Water inlet connection 3/4" gas
- (C) Water outlet connection 20mm diam.
- (F) Ice size regulation screw